Installing Your Multifunction to Additional Computers on Your Network

PIXMA mg7120

Mac OS

Installing Your Multifunction to Additional Computers on Your Network
PIXMA mg7120
Mac OS

Preparing to Connect My Multifunction to My Network **3**

Network Requirements 3

Notes on Wireless Connection 4

Installing the Drivers & Software **5**

Preparing to Connect My Multifunction To My Network

Network Requirements

Before connecting the machine to the network, make sure that configuration of the computer and access point or router is complete, and that the computer is connected to the network.

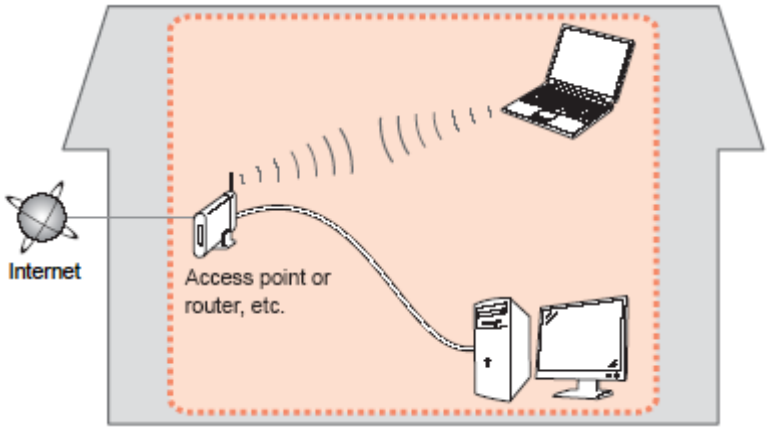

Wireless Connection

Before connecting the machine to the network, the computer needs to be connected to the network. Make sure that configuration of the computer and access point or router is complete.

Preparing to Connect My Multifunction To My Network

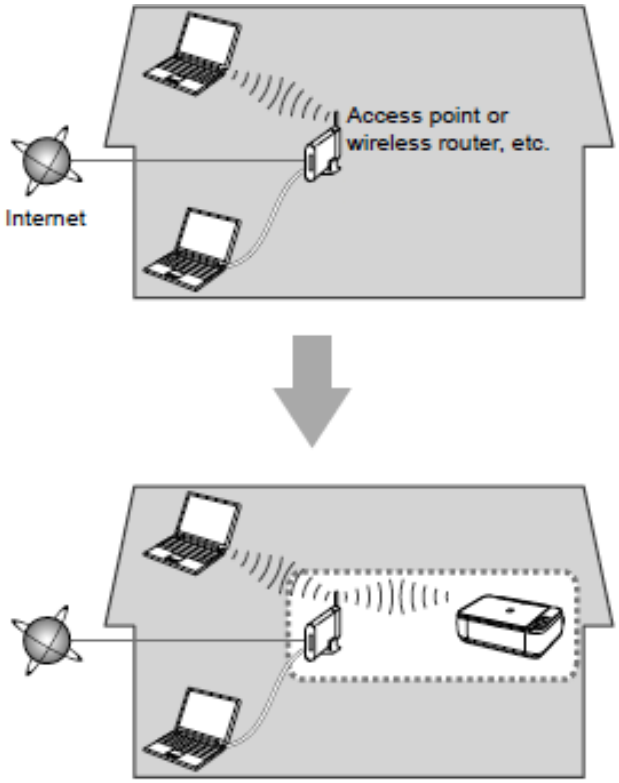

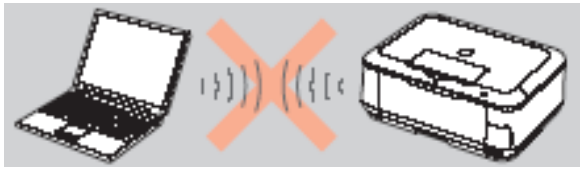

An "Ad-hoc connection," which establishes a direct connection to the computer over a wireless connection without using an access point, is not supported.

Notes on Network Connection

• The configuration, router functions, setup procedures and security settings of the network device vary depending on your system environment. For details, refer to your device's instruction manual or contact its manufacturer.

• In an office setup, consult your network administrator

• If you connect to a network that is not protected with security measures, there is a risk of disclosing data such as your personal information to a third party.

• Place the machine and computer on the same network segment.

Installing the Drivers & Software

Software Installation

To use the machine by connecting it to a computer, software including the drivers needs to be copied (installed) to the computer's hard disk. Installation time varies depending on the computer environment or the number of application software to be installed.

IMPORTANT

- Log on as the administrator (or a member of the Administrators group).
- Quit all running applications before installation.
- Do not switch users during the installation process.
- Internet connection may be required during the installation. Connection fees may apply. Consult the internet service provider.
- If the firewall function of your security software is turned on, a warning message may appear that Canon software is attempting to access the network. If such a warning message appears, set the security software to always allow access.

Installing the Drivers & Software

If your mg7120 has already been set up for on your wireless network , it is only necessary to install the software on the additional computer(s). The printer does not have to be reset and no additional settings need to be made.

To begin setup of your PIXMA mg7120 to additional computers on your wireless network, you must first download the software to your computer.

Click here to download.

After the file, mac-mg7100-1_0-mcd.dmg , has downloaded successfully, double-click it to start the install procedure.

Click **Next** on the first screen. If prompted, enter the Administrative Password to continue and click **Install Helper**.

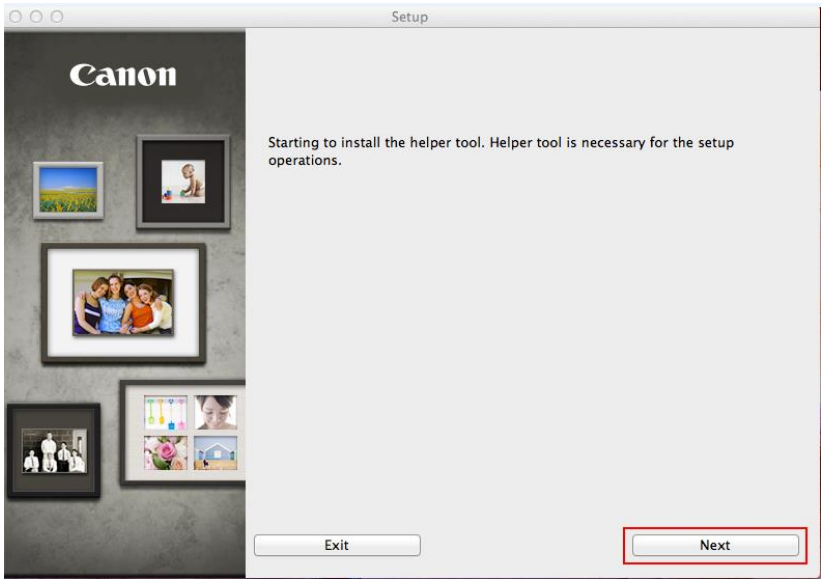

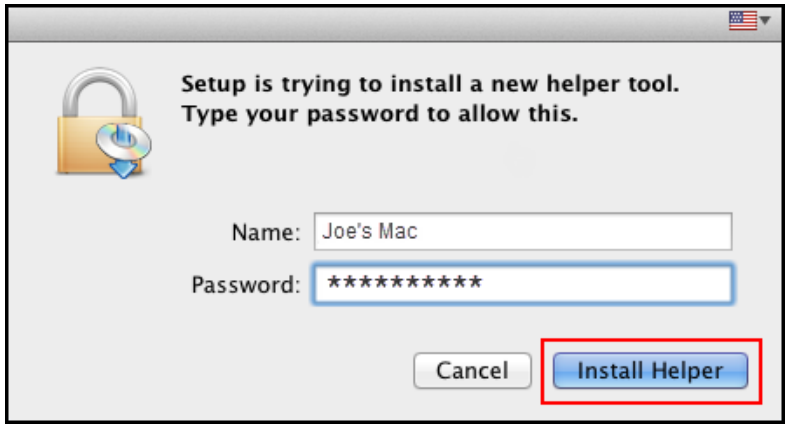

Installing the Drivers & Software

Click **Next** on the following screen.

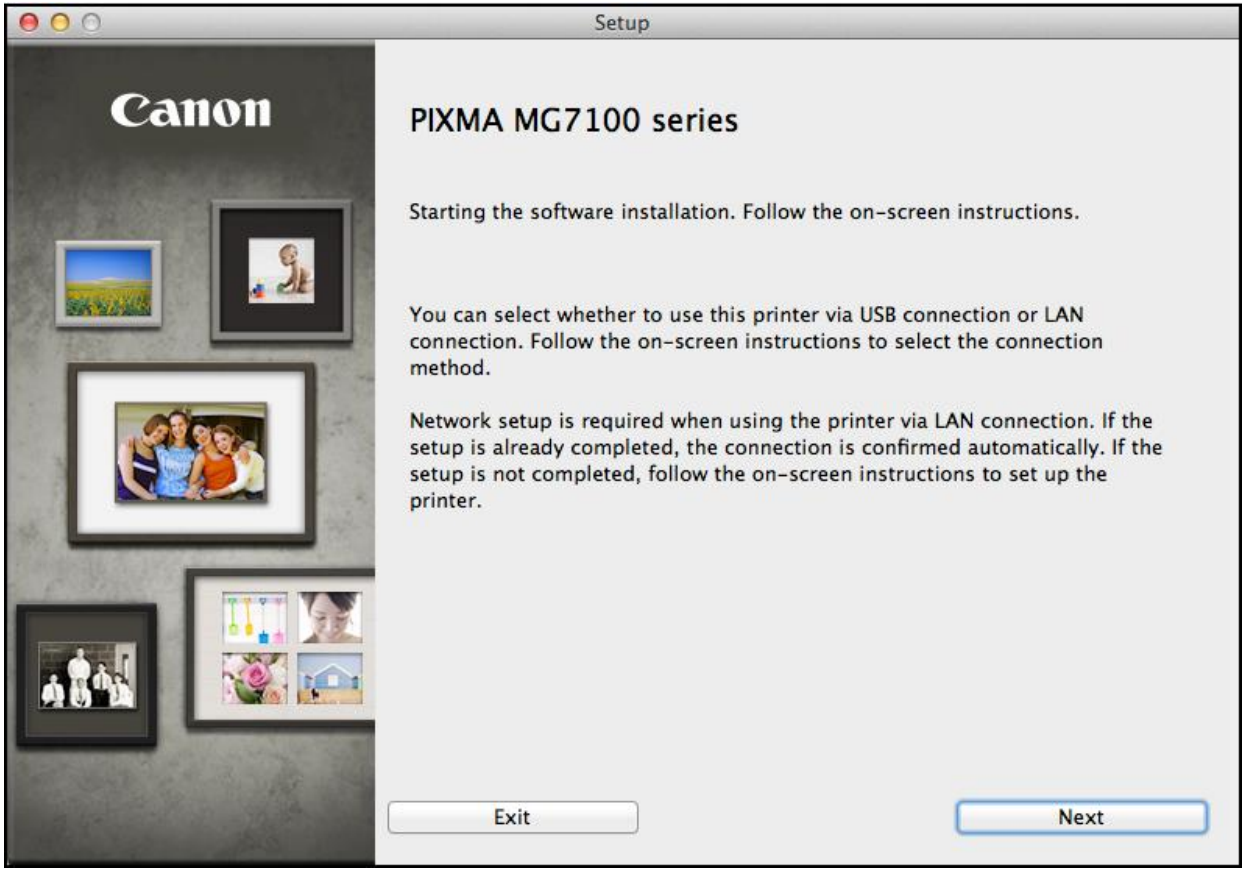
Setup
Canon
PIXMA MG7100 series
Starting the software installation. Follow the on-screen instructions.
You can select whether to use this printer via USB connection or LAN connection. Follow the on-screen instructions to select the connection method.
Network setup is required when using the printer via LAN connection. If the setup is already completed, the connection is confirmed automatically. If the setup is not completed, follow the on-screen instructions to set up the printer.
Exit
Next

Installing the Drivers & Software

Continue following on-screen instructions. On the **Software Installation List**, select *software to install and click **Next**.

***MP Drivers** and **Canon IJ Network Tool** are required and cannot be deselected. We recommend installing **My Image Garden** and **Quick Menu** to take full advantage of the printer's features.

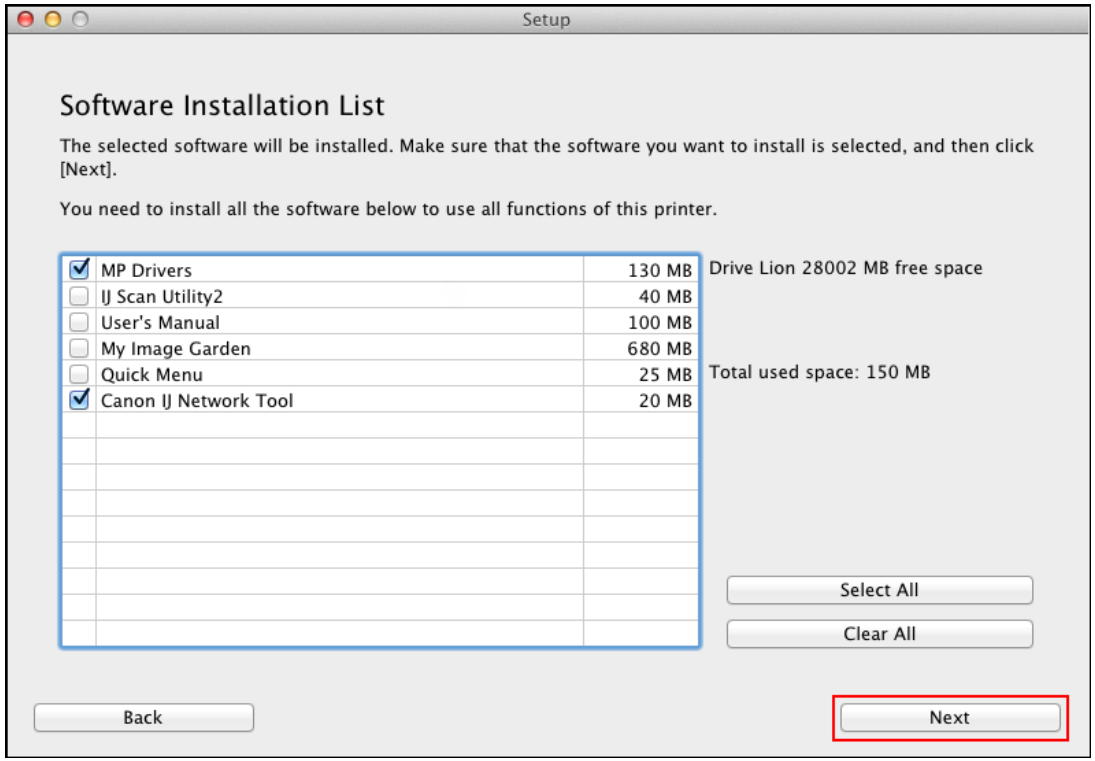
Setup
Software Installation List
The selected software will be installed. Make sure that the software you want to install is selected, and then click [Next].
You need to install all the software below to use all functions of this printer.
MP Drivers 130 MB
IJ Scan Utility2 40 MB
User's Manual 100 MB
My Image Garden 680 MB
Quick Menu 25 MB
Canon IJ Network Tool 20 MB
Drive Lion 28002 MB free space
Total used space: 150 MB
Select All
Clear All
Back
Next

Adding the Printer

Continue following the on-screen instructions.
When the **Add Printer** screen appears, click **Add Printer.**

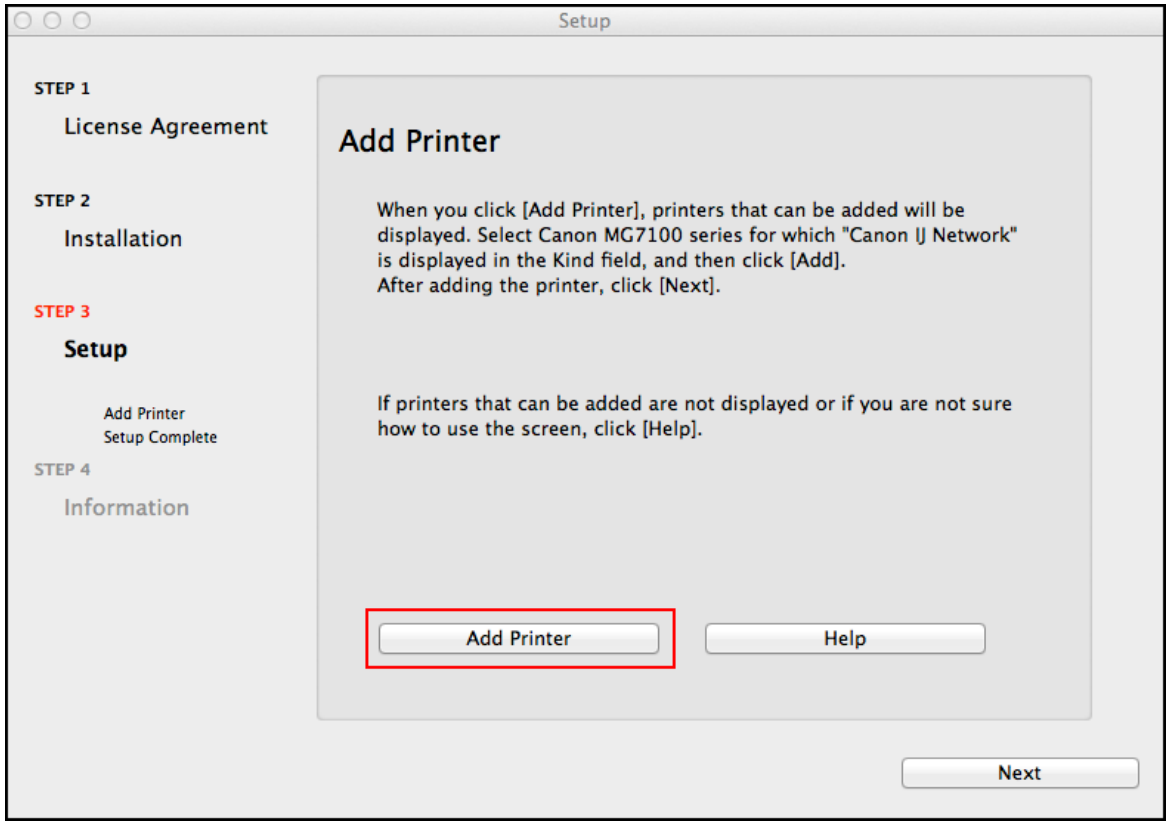
Setup
STEP 1
License Agreement
STEP 2
Installation
STEP 3
Setup
Add Printer
Setup Complete
STEP 4
Information
Add Printer
When you click [Add Printer], printers that can be added will be displayed. Select Canon MG7100 series for which "Canon IJ Network" is displayed in the Kind field, and then click [Add].
After adding the printer, click [Next].
If printers that can be added are not displayed or if you are not sure how to use the screen, click [Help].
Add Printer
Help
Next

Adding the Printer

Select the **Canon mg7100 series** with **Canon IJ Network** listed in the **Kind** column, then click **Add**.

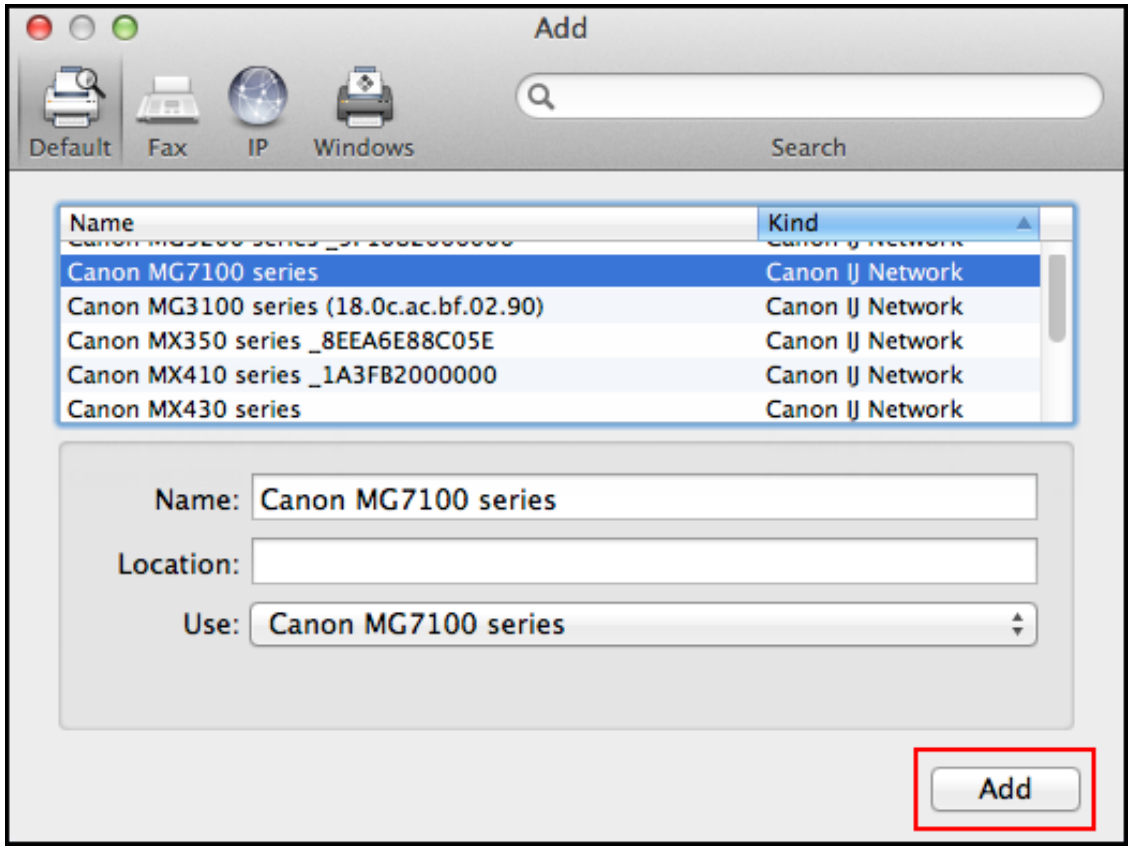

Adding the Printer

Click **Next** on the **Add Printer** screen

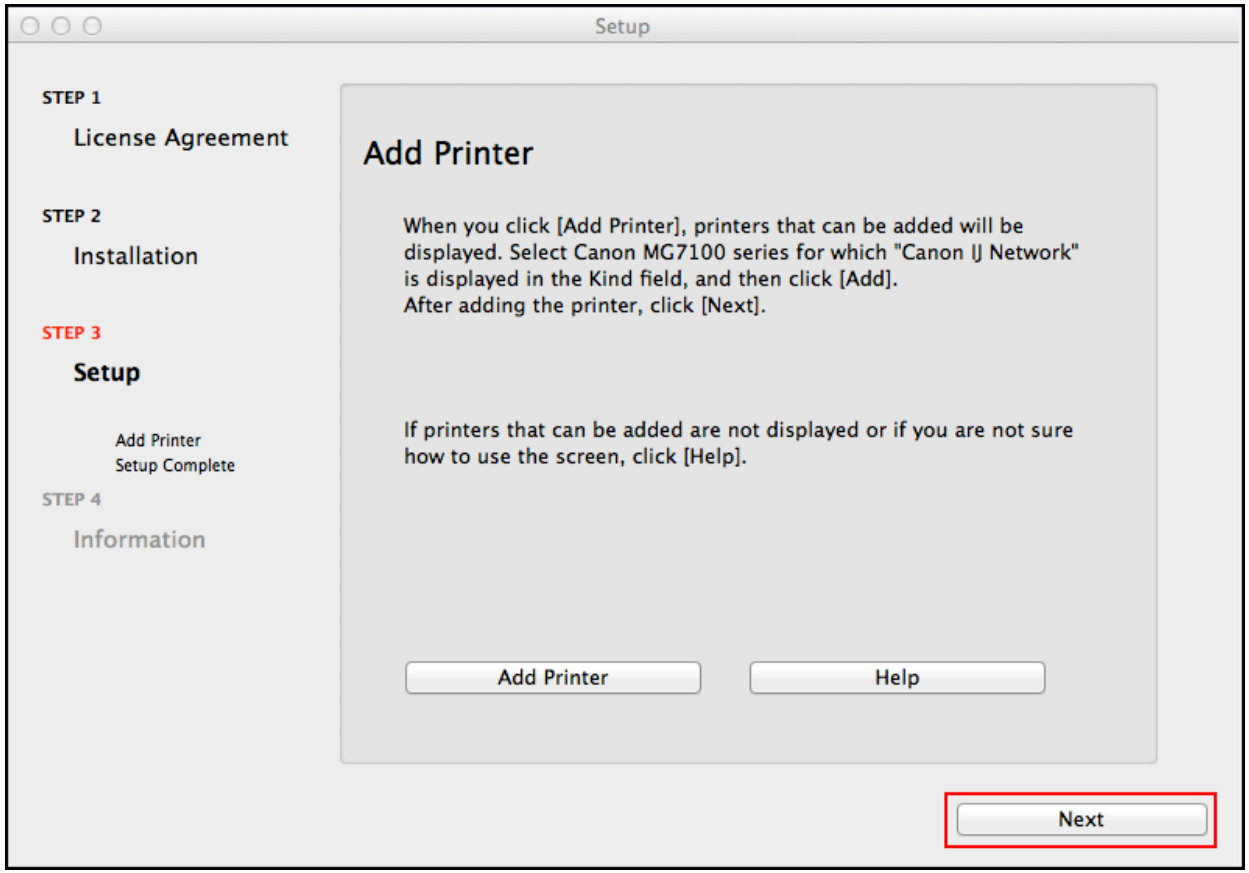
Setup
STEP 1
License Agreement
STEP 2
Installation
STEP 3
Setup
Add Printer
Setup Complete
STEP 4
Information
Add Printer
When you click [Add Printer], printers that can be added will be displayed. Select Canon MG7100 series for which "Canon IJ Network" is displayed in the Kind field, and then click [Add].
After adding the printer, click [Next].
If printers that can be added are not displayed or if you are not sure how to use the screen, click [Help].
Add Printer
Help
Next

Completing the Setup

Continue following on-screen instructions.

When the **Setup Complete** screen appears, click **Next**.

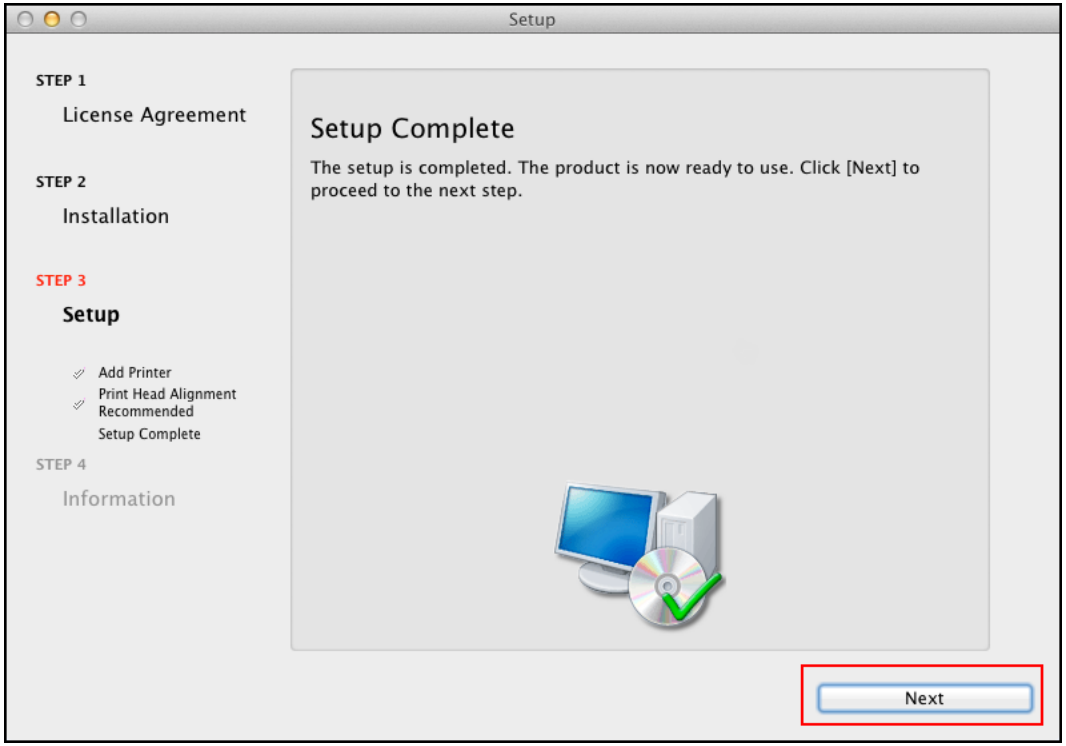

At this point, setup of the printer and network is complete. Continue to follow any remaining on-screen instructions to finish and exit the setup program.